



# HARDWARE

Product Portfolio



[www.redwop.net](http://www.redwop.net)

# INDEX

PLASTCONE <sup>®</sup> AW#.....	1
TERATILE <sup>™</sup> .....	2
TERATILE <sup>™</sup> T-BOND.....	3
REDELTITE <sup>®</sup> T-R.....	4
TILE SPACER.....	5
EPTILE <sup>®</sup> GROUT.....	6
TERATILE <sup>™</sup> GROUT.....	7
POLYGROUT.....	8
ANCHOSINE <sup>®</sup> P FIX.....	9
BUTABOND <sup>™</sup> SBR.....	10
EPBOND <sup>®</sup> .EP.....	11
SEAL CRACK.....	12
REDOSEAL <sup>®</sup> ACL.....	13
REDOSEAL <sup>®</sup> .....	14
ADH-EXPON.....	15
PLUGFAST.....	16
W - EXPON.....	17
FLASHSTRIP.....	18
BUTYWON.....	19
COREFIX.....	20
STEELGUARD.....	21
WHITECAP.....	22
CHROMSHINE.....	23
RECLEANER <sup>®</sup> - 100.....	24
WHITPLAST <sup>®</sup> .....	25
FIBER GLASS MESH.....	26
REMOL EXTRA.....	27
MICROCONE <sup>®</sup> 100PT.....	28



## PLASTCONE<sup>®</sup> AW+

Integral Waterproofing Compound

IS : 2645



CML-7600150113

### HOW TO USE

Add 200ml to 250ml Plastcane AW+ per 50kg of Cement Mixture running.

### ADVANTAGES

- Increase strength of new slab
- Make your slab waterproof
- Prevent corrosion in steel bar
- Increase cohesiveness

### WHERE TO USE

All type of RCC & PCC works,  
Imprevious and dense concrete,  
Sunken and thin slab



500ml., 1, 5, 10, 20, 50 & 200 ltr.





**TERATILE™**

**Tile Adhesive**



## STANDARD COMPLIANCE

IS 15477

## WHERE TO USE

- Ceramic Tiles
- Procline Tile
- Vitrified Tiles
- Mosaic Tile
- Porosive Stone

## ADVANTAGES

- Good Strength
- Easy Mixing
- Self Cure
- Fixing Ceramic Tiles for Floor & Wall
- Polymer Modified Adhesive
- High Bonding Strength



 10 kg Bags



## TERATILE™ T-BOND

Single Component Dry Powder for  
Cement based Slurry

### WHERE TO USE

Tile fixing on all types of low & high rise building  
To get sufficient sag resistance as well as appropriate setting time

### HOW TO USE

Add TERATILE T-BOND into required amount of cement then add water (as per the required workability) in a bucket and blend properly with electric blender. Apply prepared paste as per requirement on both the tile surface & floor surface

### ADVANTAGES

Good adjustability time & high water retention even at elevated temperature  
Develops high adhesive bond strength less prone to cracking of mortar



300gm Pouch





## REDELTITE<sup>®</sup> - R

Epoxy Adhesive For Bonding Wide Variety Material

### HOW TO USE

Mix resin and hardener according to its weight ratio and then apply

### WHERE TO USE

- Fix marble to marble
- Fix granite to marble
- Fix vitrified to wood, steel or aluminum.

### ADVANTAGES

High bonding strength



18, 36, 90, 180, 450, 900 gm.,  
1.8 kg & 9 kg.



## TILE SPACER

Tile Leveler

### HOW TO USE

- Space Wall/Floor Tiles Evenly
- Ensures an even Grout line throughout
- Equal distance between Tiles

### WHERE TO USE

- Wall & Floor

### ADVANTAGES

- Reusable
- Accuracy & Precision
- Easy way to Achieve a more professional Finish



2, 3, 4, 5, 6, 8, 10 mm





## EPTILE<sup>®</sup> GROUT

Epoxy Tile Grout

### WHERE TO USE

To fill Gap Joint  
between tile & Stone.


### HOW TO USE

First mix 100gm.  
hardener & 200gm.  
resin, then add powder  
in that mixture, mix  
again, paste is ready  
to apply in tiles joints,  
clean surplus after  
half an hour with  
wet sponge.

### ADVANTAGES

- Waterproof
- Acid proof



 1, 5 & 20 kg set





## TERATILE™ GROUT

Cement Based High Polymer Grout

### WHERE TO USE


To fill tiles / stone joints

### HOW TO USE

In 1kg. Teratile Grout mix 100 to 200 ml. of PolyGrout & remaining water then that apply paste to groove

### ADVANTAGES

High resistance against wearing Low water absorber, 24 colour Available

 500 gm & 1, 5, 20 kg bag





## POLYGROUT

Polymer Grout Admixture

### WHERE TO USE

Ceramic, Vitrified tile,  
Marble, Granite

### HOW TO USE

Mix tile grout powder to POLYGROUT & add water as per requirement. Apply the prepared mix to the tile joints with the help of trowel and remove surplus grout simultaneously.

### ADVANTAGES

- Highly water resistant
- Increases grout flexibility
- Easy to clean
- Produces high performance grout
- Natural antibacterial grout



100ml, 200ml, 500ml,  
1, 5, 10, 20, 50 & 200 Lit. Pack

# ANCHOSINE<sup>®</sup> P FIX

Polyester Resin Anchoring Grout

## HOW TO USE


Make paste by mixing powder and liquid proportionately, then fill that paste into hole.

## WHERE TO USE

Anchoring bars into column, Pillars, Slabs

## ADVANTAGES

- Rapid strength gain,
- vibration resistant,
- corrosion resistant

 500 gm., 1 & 5 kg





## BUTABOND™ SBR

Bonding Agent

### WHERE TO USE

For joint new and old slab, RCC repairing works, injection grouting.

### HOW TO USE

Bonding agent for Patch repair work. Mix 5 to 9kg. in 50kg. Cement bags for patching & repair mortar & Plaster for Masonary and for slurry bond coat 1:1:2 (SBR + Water + Cement)

### ADVANTAGES

High adhesion,  
Increase strength  
versatile,  
Cost effective



100, 250, 500 ml., 1, 5, 10,  
20, 50 & 200 ltr.



## EPBOND<sup>®</sup> EP

Old To New Concrete Bonding Epoxy Resin

### HOW TO USE


The entire contents of the 'hardener' tin should then be poured into the 'base' tin and the two materials thoroughly mixed using a suitable slow-speed drill and mixing paddle for 2 minutes until a fully uniform colour is obtained then apply using brush.

### WHERE TO USE

In application for bonding harden concrete to harden concrete & fresh concrete to harden concrete In area where extensions of concrete structure is required in all types of high & low raise building buildings

### ADVANTAGES

Enables to place the concrete up to gel time of EPBOND EP, without risk of de lamination Acts as a 'barrier coat' to the migration of chloride ions from most concrete Exhibits high mechanical strength

 1 & 4 kg Set





## SEAL CRACK

Non-shrink Cementitious Crack Sealer

### WHERE TO USE

Ready to use crack filling paste for internal & external surface cracks



### ADVANTAGES

Can be used for plaster, masonry or concrete, can be painted after application For horizontal, vertical and overhead applications Effective bonding with substrate Shrinkage cracking eliminated UV resistant For non-moving cracks up to 5-6 mm wide in plasters and walls

### HOW TO USE

SEAL CRACK shall be mixed with water adopting w/p ratio 0.36 by weight or a mix proportion of 1 part of water to 2.5 - 3.0 parts of SEAL CRACK, by volume then apply on the groove directly with the help of trowel.

 1 & 20kg Pack



## REDOSEAL<sup>®</sup> ACL

Acrylic Sealant



### HOW TO USE

Open seal, Ready to use and apply using trowel

### WHERE TO USE

- Joints between wooden and metal window frames
- joints between concrete and brickwork / Plaster cracks

### ADVANTAGES

Depends on application.



1, 5 & 20 kg.





# REDOSEAL<sup>®</sup>

## PU Sealant

### HOW TO USE

Firmly extrude sealant into joint with help of gun, make sure that it is in full contact with the sides of joints

### WHERE TO USE

- Building expansion joints where elasticity required
- External walling
- Curtain walling and cladding
- Panel wall, door and window perimeter sealing
- Sealing joints in precast elements
- Crack sealing in waterproofing works



600ml. Capsule





## ADH-EXPON

High strength epoxy bonding for joint sealing system

### HOW TO USE

Prime the surface if necessary with BUTABOND SBR mixed with cement. Mix the pack of part A & part B properly which is supplied in pre weight quantity. Apply the mix evenly with the help of trowel or spatula on the Prepared Surface.



6kg Kit

### ADVANTAGES

- Low VOC makes it eco friendly, High resistance to chemical resistance, Highly adhesive to W-EXPON belt, High resistance to aggressive environment, Highly durable

### WHERE TO USE

- Tunnels & culverts,
- Hydroelectric power plants, Sewage treatment plants,
- Roof joints,
- Basements,





## PLUGFAST

Leak Plugging Mortar

### WHERE TO USE

Rapid temporary patching & plugging of concrete segments  
Concrete and brick tunnel linings  
Sewage systems  
Foundations and mines


### HOW TO USE

PLUGFAST should be added to clean water & Mix to a stiff consistency in a suitable container using a trowel or gloved hand. Trowel apply or hand-knead the mixed mortar in place, ensuring maximum contact with the substrate before the material sets.

### ADVANTAGES

Emergency water stopping capability  
Excellent bond to the substrate  
Low exothermal minimizes thermal cracking  
Contains no chloride admixtures



 1, 5 & 20kg Bag



## W – EXPON

Ethylene propylene diene  
monomer flexible belt

### WHERE TO USE

- Tunnels & culverts,
- Hydroelectric power plants, Sewage treatment plants,
- Roof joints,
- Basements,
- Suspension Joint

### HOW TO USE

W-EXPON sheet tension-free and in a way that movement of the connected building parts can be accommodated without damaging the membrane. Press the membrane sheet on the adhesive by a plastic roller.

### ADVANTAGES

- Highly flexible waterproofing
- Ozone- and UV-Resistant
- Minimizes risk of cracks and dusty surfaces



4, 6, 8 & 12 inch Roll





## FLASHSTRIP

Bitumen Felt

### HOW TO USE

Direct paste on leakage area.

### WHERE TO USE

On steel sheet, cement sheet, fiber sheet etc to stop water leakage.

### THICKNESS

1.5mm.



50mm. x 10mtr.  
100mm. x 10mtr.  
150mm. x 10mtr.



## BUTYWON

Butyl Based Leak-Proof  
Flashing Tape

### WHERE TO USE

Joints in various surface  
such as Metal, Cement,  
Concrete, Asbestos, Fiber,  
Polycarbonate, Plastic,  
Glass, Vinyl etc.  
Prevent leakages,  
Cover cracks

### ADVANTAGES

- Excellent UV Resistance  
Remains flexible  
throughout its service life



50mm. x 10mtr.  
100mm. x 10mtr.





## COREFIX

Core Fixing Epoxy Grout

### HOW TO USE

Pour all the resultant liquid into a container with a capacity of 10 liters. Add all the filler provided for each product. Mix. Using a slow speed power mixer for 2 minutes or until a uniform colour is achieved in the grout.

### WHERE TO USE

To fill the gap between pipe & casing To avoid longterm deterioration of pipe Grouting of base plates of turbines, compressors, boiler feed pumps

### ADVANTAGES

To provide additional support & protection to the pipeline. High compressive, tensile & flexural strengths Fast, convenient installation with early strength gain Applicable on both vertical and horizontal direction.



5 kg Set



## STEELGUARD

Zinc Based Anti-corrosive Coating

### HOW TO USE

The first coat should be applied to all areas by the use of suitable brushes or rollers to achieve a uniform coating with wet film thickness not less than 175 microns. The second coat of STEELGUARD should be applied exactly as detailed above, again achieving a wet film thickness not less than 175 microns.



20 Lit. Pack

### ADVANTAGES

- Combats corrosion
- Permanent protection to the steel structures
- Excellent adhesion to steel
- Time Saving—touch dry after 15 to 20 Minutes
- Exhibits excellent bond strength in cementitious repair.

### WHERE TO USE

- Steel surface
- Concrete surface





## WHITECAP

Toilet Cleaner

### HOW TO USE

- Do sprinkle around the rim,
- Put it on toilet bowls with Brushes, Tiles, Glass, and Furs

### WHERE TO USE

- Tiles
- Floor
- Glass
- Bathroom-Toilet

### ADVANTAGES

- Urgent Action, Microbial hazards Reduces,
- Gives a deep clean.



 1 & 5kg Pack





## CHROMSHINE

Cleaner for Chromium Plated  
Fitting & Sanitary wares

### HOW TO USE

Liberal spray CHROMSHINE on CP Fittings & Sanitary area to be cleaned. Using a cotton cloth, tooth brush or a scrubbing pad, thoroughly scrub the area treated with CHROMSHINE



500ml Pack

### WHERE TO USE

CP Fitting & Accessories,  
Bath Fittings & Bath  
Accessories Kitchen  
Sinks, Washbasins  
Sanitary Wares

### ADVANTAGES

Ready to use as a  
spray cleaner





## RECLEANER<sup>®</sup> - 100

Tile Cleaner

### HOW TO USE

Direct apply with brush on tiles, clean after 5min with water.

### WHERE TO USE

To clean tiles, granite, Marble.

### COVERAGE

40 to 50 ft<sup>2</sup> per ltr.



500 ml, 1, 5, 10 & 20 ltr.

# WHITPLAST®

Wallputty



## HOW TO USE

Add 8.80 to 9 ltr. water into 20 kg of Whitplast bag, mix properly, then apply with putty knife.

## WHERE TO USE

Suitable for exterior and interior wall.

## COVERAGE

300 ft<sup>2</sup> per 20kg of Whitplast bag @ 300 micron thickness.



1, 5 & 20 kg bag





## FIBER GLASS MESH

45 GSM / 80 GSM / 145 GSM

### HOW TO USE

After applying first layer of waterproofing as per the requirements by using appropriate equipment. Lying of the net over the first coat of the application done, positioning it in the vertical or horizontal directions and overlapping the joints by at least 10 cm.

### WHERE TO USE


- In kitchen wash area
- Terrace or roof area
- Areas near water bodies where hydrostatic pressure exist
- To repair patches of floors, ceiling and rendering walls
- Toilet bathroom & sunken portion

### ADVANTAGES

- Durable and flexible
- Easy embedment
- Easy in installation
- Ready to use
- Easy to cut with knife or scissors



50 metre Roll

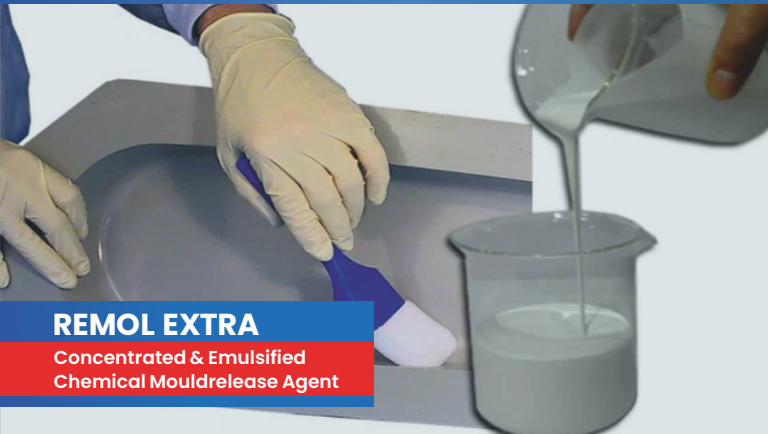

## REMOL EXTRA

Concentrated & Emulsified  
Chemical Mouldrelease Agent

### HOW TO USE


First dilute REMOL EXTRA concentrate in the proportion of 1:6 with water, using a clean container and stirring thoroughly until evenly mixed. Apply the REMOL EXTRA 1:6 water dilution to the face of the formwork by spray, brush or cloth. Only one coat should be applied.

### WHERE TO USE

- For easy & stain free release of concrete moulds and formwork of all types
- Wooden formwork is used and demolding or stripping times exceed 24 hours

### ADVANTAGES

- Produces really fair faced finish concrete Reduces storage and transport costs
- Aids corrosion inhibition
- No cleaning of unsightly oil stains if plastering is not required

 1 Lit. Pack



## MICROCONE<sup>®</sup> 100PT

Vertical & Overhead Cementitious Patch  
Work Repair Fiber Reinforced Mortar

### HOW TO USE

Mix thoroughly MICROCONE RGL powder & water in water cement ratio in 0.18.


### WHERE TO USE

- Vertical & overhead repairs
- General concrete & masonry repairs
- Voids greater than 10 mm deep

### ADVANTAGES

- Saving time & expense of multiple applications
- Obviates the need for formwork
- Polymer-modification provides extremely low permeability to water, carbon dioxide & chlorides.
- Excellent bond to the concrete substrate



 10kg Bags



PARTNER

## Our Application

R Partner Scan App is for usage by Redwop Applicators who buy Redwop products. R Partner Scan App helps scan and validate QR codes on redeemable coupons in selected packs of Redwop products. These validated coupons would result in instant credit of the coupon value to the Wallet account updated by the user on the Redwop R Partner App.

- Wallet
- Notifications
- Scan Coupon to get Points
- Offer for you
- Coupons
- View Wallet Transactions of scanned coupon



## **REDWOP CHEMICALS PVT. LTD.**

2<sup>nd</sup> Floor, Pearl Plaza Complex, Nr. GT Sheth School, 150ft Ring Road,  
Rajkot 360005, Gujarat, India

✉ [info@redwop.net](mailto:info@redwop.net)  [www.redwop.net](http://www.redwop.net)  +91 97246 55551  +91 281 2576664