


Redwop[®]
INNOVATING FOR A BETTER WORLD

CONCRETE ADMIXTURE

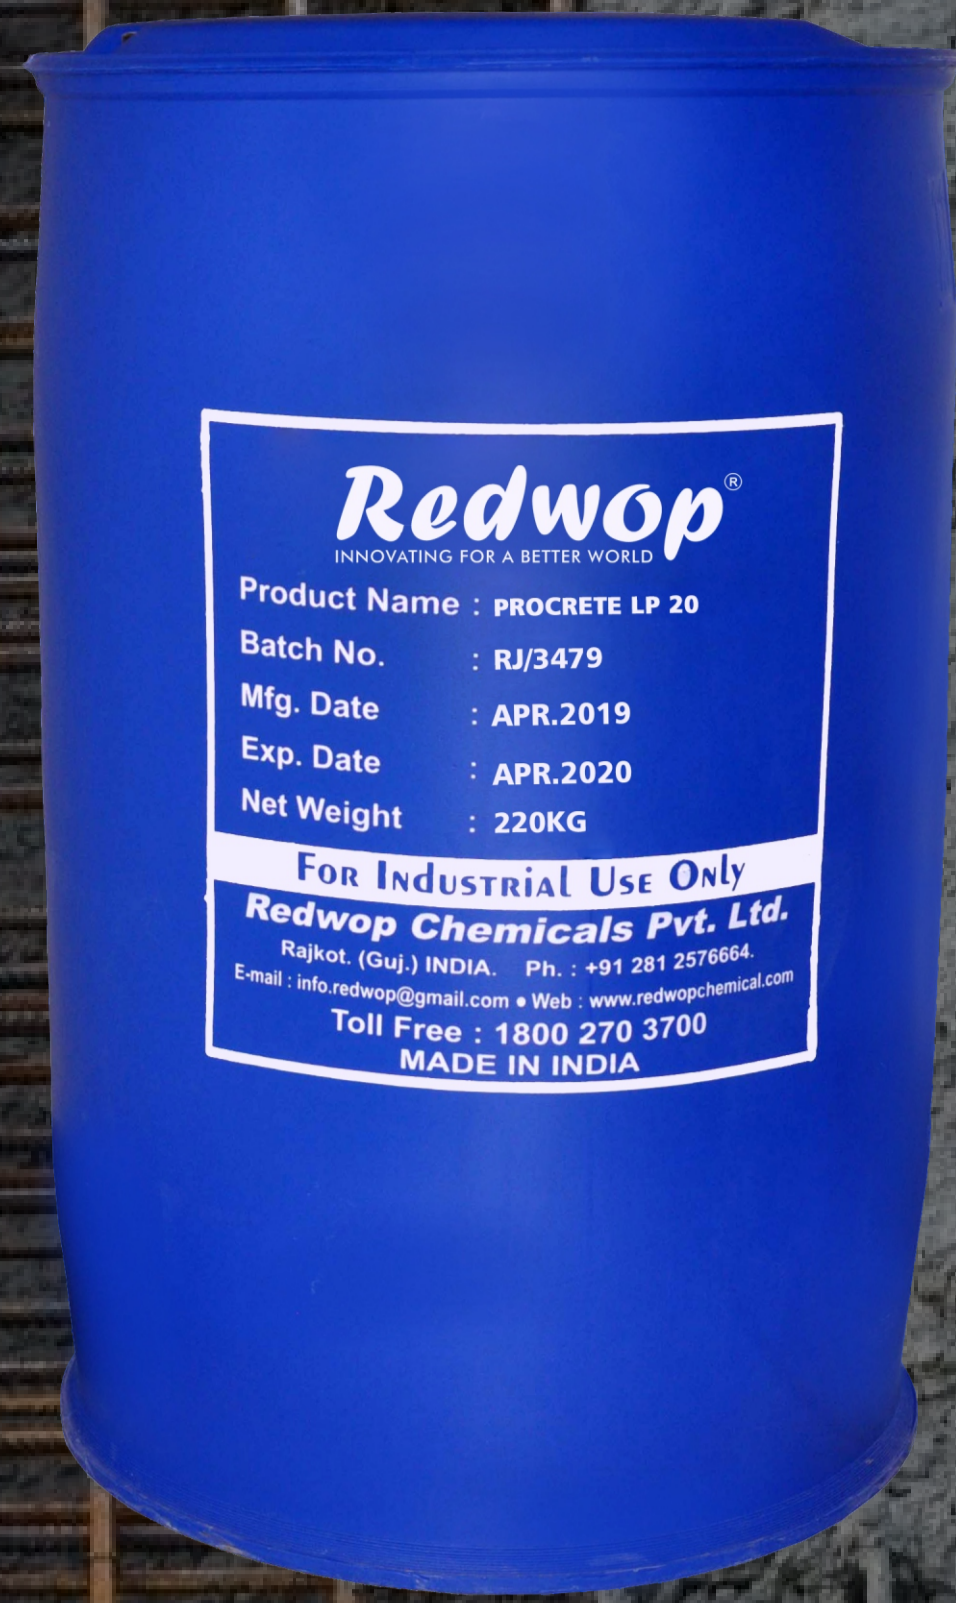

PROCRETE LP20

Water reducer Low PC Based

Description

PROCRETE LP20 is a chlorine free Poly carboxylic ether based water reducing admixture. It is supplied as a brown solution which instantly disperses in water. It disperses the fine particles in the concrete mix, enabling the water content of the concrete to perform more effectively and improving the consistency of the concrete. This produces higher levels of workability for the same water content, allowing benefits such as water reduction and increased strengths to be taken.

Advantages

- Allows specified strength grades to be met at reduced cement content or increased workability
- Water reduction significantly improves compressive strengths at all ages and enhances durability through the production of low permeability concrete.
- Minimizes the risk of segregation and bleeding and assists in the production of a dense, close textured surface, improving durability.
- Chloride free, safe for use in prestress and reinforced concrete.

Uses

- To improve the effectiveness of the water content of a concrete mix
- Higher dosages provide effective means of reducing concrete permeability and thereby reducing water penetration

Confirm standard

- IS 9103:1999

Compliance standard

- BS: 5075:1985 part-3
- ASTM C494 Type A

Technical Information

PROPERTIES	RESULTS
Appearance	Brown Liquid
Sp. Gravity	1.05 to 1.10 @25°C
pH Value	6 to 8
Chloride Content	Nil

Method of Application

- The optimum dosage of PROCRETE LP20 to meet specific requirements should always be determined by trials this allows the optimization of admixture dosage and mix design and provides a complete assessment of the concrete mix. A starting point for such trials is to use a dosage within the normal typical range of 0.6 to 1.2% of cementations material, including PFA, GGBFS and micro silica.

This in turn leads to a series of associated benefits

- Strength:** Reduced water cement ratio in concrete will ultimately increases the strength of concrete in all ages. This admixture will decrease water demand required for concrete and reduced water will increase strength of concrete.

Reducing water permeability ('waterproofing'): One of the most effective means by which the water permeability of a concrete mix can be reduced is to make a large reduction in water- cement ratio. PROCRETE LP20 can be used to provide such a reduction and to produce a concrete with the benefits of low permeability.

Over dosing

- An overdose of double the intended amount of PROCRETE LP20 will result in an increase in retardation as compared to that normally obtained at the intended dosage.

Curing

- Normal good curing practice should be adopted

Packaging

- PROCRETE LP20 is supplied in 200 kg containers.

Storage

- Minimum of 12 months shelf-life if kept under room temperature (i.e. 27°C).

For selection of admixture

- As per your project please visit our smart store in www.redwop.net

Note: All technical data stated in this product data sheet are based on laboratory tests. Actual measured data may vary according to trails and quality of material availability.

REDWOP CHEMICALS PVT. LTD.

Head office: 2nd Floor, Pearl plaza Complex, B/S GT Sheth School, Near KKV Hall, 150ft Ring Road, Rajkot- Pin.360005 Gujarat, India.

✉ info@redwop.net

🌐 www.redwop.net

☎ +91 97246 55551

☎ +91 281 2576664